

# Earth-Rite® OMEGA II



The **Earth-Rite® OMEGA II** is a compact panel mounted static grounding module that can monitor a range of resistance values, based on the grounding application and installation requirements of specific processes.

**Inquiry** > Click here to submit a product related query or a request for quotation.

The OMEGA II monitors the resistance of the static grounding circuit for processes where a risk of static charge accumulation on the equipment could result in an incendive electrostatic spark within locations that have potentially flammable atmospheres present.

It is specified primarily for applications where an alternative means of ground status indication is provided, e.g. via panel mounted indicators or remote indicator stations, as opposed to more regular grounding solutions in the **Earth-Rite®** range.

The DIN rail mountable module can be located in an electrical panel mounted in a non-hazardous area or inside an XP certified enclosure located inside the hazardous area.

Two dry contacts can be used to switch power to additional ground status indicators or interlock with the process to shutdown product transfer when the OMEGA II detects an open circuit on the path to ground.



**Earth-Rite OMEGA II**

## Ground Resistance Monitoring Set Points


The OMEGA II is designed specifically for monitoring the static grounding of process equipment and has 4 resistance set points depending on the installation and operating characteristics of the application. It can also be installed to monitor the resistance of bonding circuits and lightning protection grounding points.

- > 0 ohms to 2 ohms to monitor low resistance bonding paths.
- > 0 ohms to 4 ohms.
- > 0 ohms to 10 ohms (recommended values of resistance in IEC 60079-32 & NFPA 77).
- > 0 ohms to 600 ohms (to monitor the grounding of rotating machinery).

## Earth-Rite® OMEGA II

### Technical Specification

<b>Power supply:</b>	24V dc stabilised supply (Supply voltage range: 18V to 30V dc). Up to four OMEGA II modules can be powered by Newson Gale's 24V DC power supply (Product code: VESF80)
<b>Power rating:</b>	5 Watts
<b>Power supply protection:</b>	500 mA fast blow fuse connected into the supply circuit (not included).
<b>Ambient temperature range:</b>	-40°C to +60°C -40°F to + 140°F.
<b>Ingress Protection:</b>	Type 1
<b>Module nett weight:</b>	0.55 lbs (0.25 kg)
<b>Enclosure material:</b>	Polycarbonate
<b>Output Contact relay rating:</b>	1 pair of NO/NC changeover contacts 250 V AC, 5 A, 500 VA max resistive. 30 V DC, 2 A, 60 W max resistive. The relay is designed to switch Low Voltage circuits or Extra Low Voltage circuits. A slave relay should be used for switching Low Voltage circuits and Extra Low Voltage circuits at the same time.
<b>Resistance monitoring set points:</b>	0 ohms to 2 ohms. 0 ohms to 4 ohms. 0 ohms to 10 ohms (IEC 60079-32 & NFPA 77 recommended). 0 ohms to 600 ohms (typically used for grounding rotating equipment).
<b>Mechanical dimensions:</b>	Units in inches: 3.5 x 4.1 x 2.3

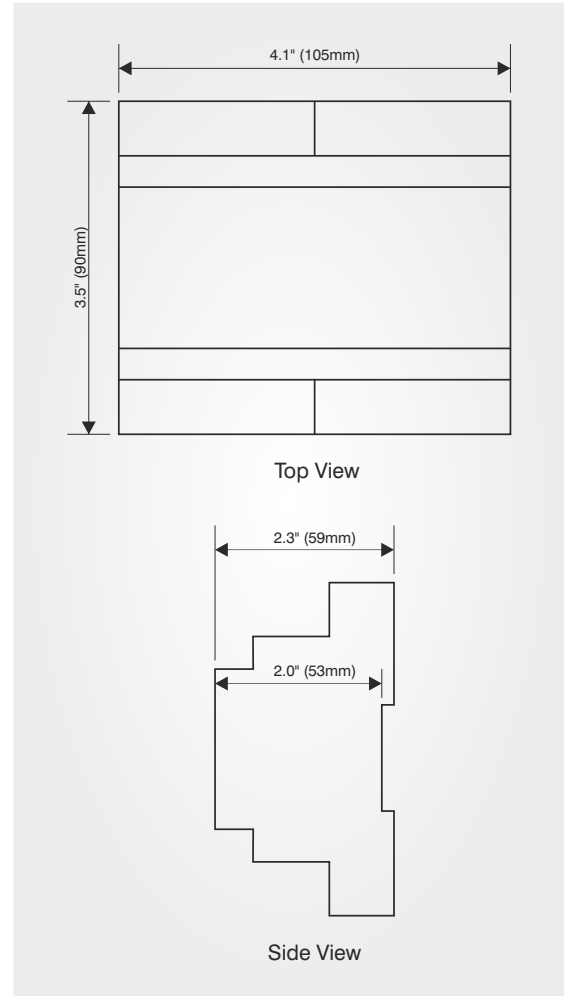

### Hazardous Area Certification

Europe / International:	North America:
<b>IECEX</b> [Ex ia Ga] IIC (gas & vapour). [Ex ia Da] IIIC (combustible dusts). Ta = -40°C to +60°C. IECEX SIR 13.0003X IECEX certifying body: SIRA.	<b>NEC 500 / CEC (Class &amp; Division)</b> Intrinsically safe associated apparatus for supply to locations classified: Class I, Div. 1, Groups A, B, C, D. Class II, Div. 1, Groups E, F, G. Class III, Div. 1. Ta = -40°C to +60°C. Ta = -40°F to +140°F OSHA recognised NRTL: CSA.
<b>ATEX</b> Ⓢ II (1)GD [Ex ia Ga] IIC (gas & vapour). [Ex ia Da] IIIC (combustible dusts). Ta = -40°C to +60°C. SIRA 13ATEX2009X ATEX Notified Body: SIRA.	<b>NEC 505 &amp; 506 (Class &amp; Zoning)</b> Class I, Zone 0, [AEx ia], IIC (gas & vapour). Class II, Zone 20, [AEx iaD], IIIC (combustible dusts).
	<b>CEC Section 18 (Class &amp; Zoning)</b> [Ex ia] IIC

### Additional Certification

<b>Safety Integrity Level:</b>	SIL 2 (in accordance with IEC/EN 61508).
<b>SIL assessment body:</b>	ExVeritas.
<b>EMC Tested:</b>	to EN 61000-6-1, EN 61000-6-3, FCC Part 15 (Class B Digital).



The Earth-Rite® OMEGA forms part of the Earth-Rite® range of Static Grounding and Bonding Equipment available from Newson Gale Ltd.

## Earth-Rite® OMEGA II

### System Options

Newson Gale supplies a range of product options that enhance the control and general safety of transfer processes and aid engineers with system installations and routine system service checks. Contact Newson Gale or your local Newson Gale representative for more information on the range of options available.

#### Universal Resistance Tester

The URT is designed to provide owners of Newson Gale **Earth-Rite®** and **Bond-Rite®** static grounding systems with a means of regularly testing the grounding settings for their system on a routine basis.

Periodic testing with the URT verifies that the grounding system's **GO/NO GO** settings are working in compliance with the recommendations of:

**NFPA 77:** "Recommended Practice on Static Electricity."

**IEC 60079-32-1:** "Explosive atmospheres. Part 32-1: Electrostatic hazards, guidance."

The easy to use tester consists of a pair of switches that enable an electrician to set up the resistance level at which the grounding system should be working and conduct a **PASS / FAIL** test at the required setting.

**Earth-Rite®** and **Bond-Rite®** products that can be tested with the URT:

- > Earth-Rite® PLUS
- > Earth-Rite® FIBC (both 10 meg-ohm and 100 meg-ohm variants)
- > Bond-Rite® CLAMP
- > Bond-Rite® EZ
- > Bond-Rite® REMOTE
- > OhmGuard® (both 10 ohm and 100 ohm variants).

#### Hazardous Area Strobe Light

The strobe light is mounted in an elevated position and when the equipment is correctly grounded, flashes continuously informing personnel that a transfer process is underway and is protected from the static hazard. The strobe light can be used in conjunction with the **Earth-Rite RTR** and **Earth-Rite PLUS**.

- > 115 V / 230 V AC and 24 V / 48 V DC options.
- > Amber, Green & Red strobe colour options.



**Universal Resistance Tester**  
Product Code: URT.



**Hazardous Area Strobe Light**  
Product Code: VESI/33U  
(Class/Div)  
Inquire for color and mounting options

## Earth-Rite® OMEGA II



### Product Ordering Codes

Product Codes	Product Description
<b>ER/OM2/02</b>	Earth-Rite OMEGA II / 0 ohms to 2 ohms resistance monitoring range. (To monitor the condition of bonding connections to True Earth grounding points.)
<b>ER/OM2/04</b>	Earth-Rite OMEGA II / 0 ohms to 4 ohms resistance monitoring range.
<b>ER/OM2/10</b>	Earth-Rite OMEGA II - 0 ohms to 10 ohms resistance monitoring range. (Recommended ground resistance values in IEC 60079-32 & NFPA 77).
<b>ER/OM2/600</b>	Earth-Rite OMEGA II - 0 ohms to 600 ohms resistance monitoring range. (For monitoring the grounding of rotating machinery).
<b>VESF80</b>	115 to 230 V AC Power supply - powers up to 4 OMEGA II modules simultaneously.
<b>VESX90-IP</b> <b>VESX45-IP</b>	Large and standard Heavy Duty grounding clamps to connect the OMEGA II to process equipment requiring static grounding protection.
<b>VESI33U</b>	Explosion Proof Strobe Light (colour options amber, clear, blue, green and red) - Please inquire for more details
<b>ER2/URT</b>	Universal Resistance Tester
<b>Additional Accessories</b>	Please note: the method of connecting the OMEGA II to process equipment will be dictated by the application and installation characteristics of the process. Contact Newson Gale to determine which combination of clamps, cables, reels and junction boxes can be used to provide the optimum installation.

**Contact Us >** Your inquiry will be processed rapidly via our webform enquiry service. If you would prefer to call us, or e-mail us, please use the contact details provided below.

**United Kingdom**  
Newson Gale Ltd  
Omega House  
Private Road 8  
Colwick, Nottingham  
NG4 2JX, UK  
+44 (0)115 940 7500  
groundit@newson-gale.co.uk

**Deutschland**  
IEP Technologies GmbH  
Kaiserswerther Str. 85C  
40878 Ratingen  
Germany  
+49 (0)2102 5889 0  
erdung@newson-gale.de

**United States**  
IEP Technologies LLC  
417-1 South Street  
Marlborough, MA 01752  
USA  
+1 732 961 7610  
groundit@newson-gale.com

**South East Asia**  
Newson Gale S.E.A. Pte Ltd  
136 Joo Seng Road, #03-01  
Singapore  
368360  
+65 6704 9461  
ngsea@newson-gale.com