



Static electricity is trapped electric charge on the surface of a material which can accumulate to hazardous levels over a short period of time. When an imbalance of static charge is present on an object, the object is said to be electrified. Contact electrification occurs when, for example, powder particles collide or rub against a conveyor during mixing and when the insulating soles of footwear make contact with flooring. Rubbing two materials against each other increases the contact between their surfaces, which is what is known as the triboelectric effect.

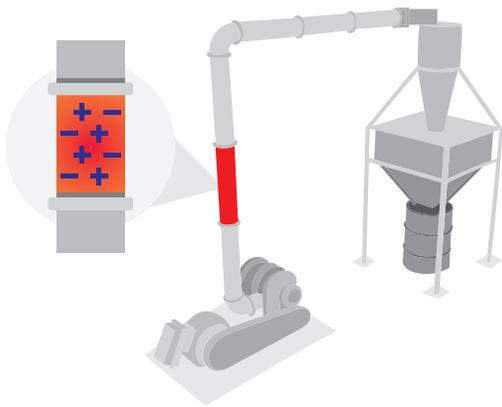

Static electricity is generated in industry by virtually all operations and processes involving movement – for example, product transfer, mixing and size reduction. Fires and explosions can occur as a result of uncontrolled static discharge from plant, people and processes, and sadly, these commonly result in civilian injuries and fatalities, as well as significant financial losses in direct property damage and plant downtime.

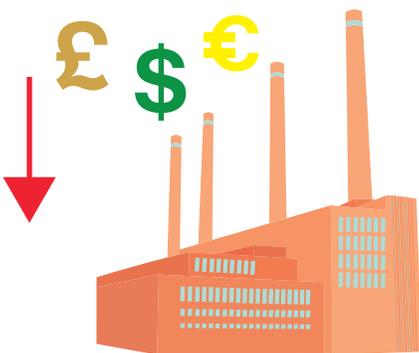

# 01

## Fundamentals of Static Electricity in Hazardous Area Industries

To people in everyday life static electricity is simply an annoyance. In industries where hazardous materials are handled, static electricity is a very real and unseen hazard that can act as a catalyst for fires or explosions in flammable and combustible atmospheres. It is often misunderstood and is a volatile source of ignition encountered in modern industry. Static electricity is, by definition, an insidious and therefore difficult to detect, phenomenon. Despite this commonly held perception the generation of electrostatic charge can be predictable and potentially controllable.

# 02

Hazardous Area Classification and Control of Ignition Sources by the HSE list 19 potential sources of ignition, with electrostatic discharge sparks listed amongst them.



# 03



*It is necessary to transfer only about one electron for each 500,000 atoms to produce a condition that can lead to a static electric discharge*



**– NFPA 77, Recommended Practice on Static Electricity Section: 5.2.1**

“

All large conductive objects, such as fixed plant and equipment systems, should be earthed. Where the earthing is by means of metallic conductors the resistance to earth should be less than 10 Ω. This resistance indicates a reliable earth connection with a metallic conductor.

”

**- IEC 60079-32-1  
Section: 10.1.2**

The sensitivity of a flammable atmosphere to electrostatic ignition depends on the concentration and minimum ignition energy (MIE) of the flammable material. The minimum ignition energy (MIE) is one of the most important considerations when assessing the explosion risks and protection techniques when handling flammable and combustible materials. It identifies the measure of the minimum amount of spark energy necessary to ignite the material when it is in its combustible range.

Powders	MIE (mJ)
Corn Flour	20
Aspirin	25 to 30
Sugar	30
Magnesium	40 to 80
Aluminium	50
Wheat Flour	50
Zinc	200

# 04


Generation of charge itself is not a threat, however the unrestricted accumulation of static that is allowed to freely build up in flammable or combustible atmospheres is. Charge accumulates on industrial process equipment as a result of their isolation from earth. A build-up of electrostatic charge will eventually develop enough energy to discharge a spark onto an object held at a different potential in an attempt to equalise the charge. Objects at earth potential could be operators working in the vicinity of a vacuum truck or filling pipe situated in the hatch on a road tanker.



# 05

# 06

The most important action an operator can take to control static electricity is to ensure any conductive objects are connected to a verified earth. This will avoid the most common problem which is the accumulation of charge on a conductor and the release of virtually all the stored energy as a single spark.

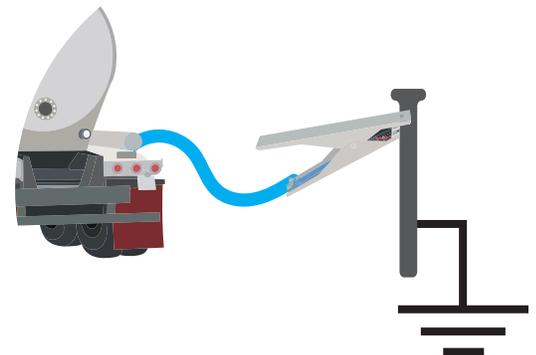

**Leading the way in hazardous area static control**



[www.newson-gale.com](http://www.newson-gale.com)

2/2

**Copyright Notice**

The website and its content is copyright of Newson Gale Ltd © 2020. All rights reserved.

Any redistribution or reproduction of part or all of the contents in any form is prohibited other than the following:

- you may print or download to a local hard disk extracts for your personal and noncommercial use only
- you may copy the content to individual third parties for their personal use, but only if you acknowledge the website as the source of the material

You may not, except with our express written permission, distribute or commercially exploit the content. Nor may you transmit it or store it in any other website or other form of electronic retrieval system.

**Right to change**

This document provides general information only and may be subject to change at any time without notice. All information, representations, links or other messages may be changed by Newson Gale at any time without prior notice or explanation.

Newson Gale is not obliged to remove any outdated information from its content or to expressly mark it as being outdated. Please seek the advice of professionals as necessary regarding the evaluation of any content.

**Disclaimer of liability**

The information provided in this Infographic is provided by Newson Gale without any representations or warranties, expressed or implied, as to its accuracy or completeness. The liability of Newson Gale for any expenses, losses or actions incurred whatsoever by the recipient as a result of the use of this Datasheet shall be excluded.